



ACO Industrial

Floor Drainage

RO125 range

Rofo™
A brand of the ACO Group



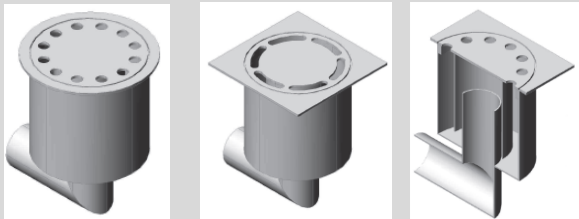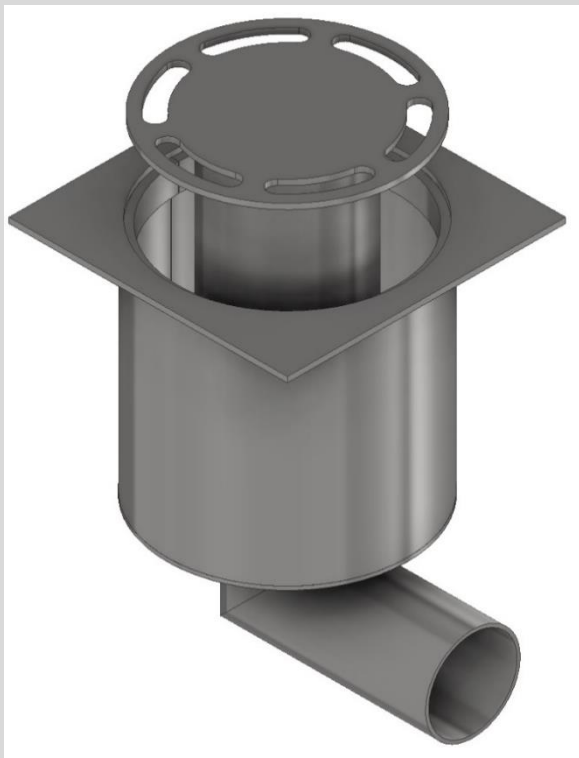

Product range

and Specification

RO125H NW50 range




Full Flow Floor Trap with the following features:



- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A single water seal to ensure odor-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Top cover plate type: Slots or Holes – as required
 - Flow rate: 0.8l/sec
 - Load capacity : 400 kg
 - Outlet position: Bottom Horizontal
 - Outlet pipe outside diameter: 50.8mm

NOTE: Floor finish to be specified

Typical applications:

Public toilets, Office block kitchenettes, Laundries

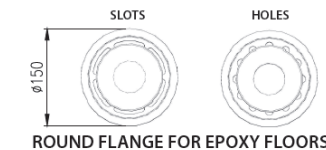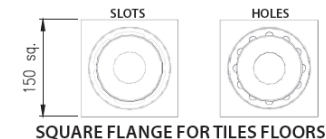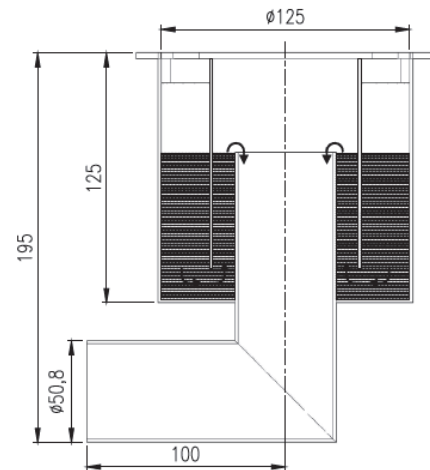

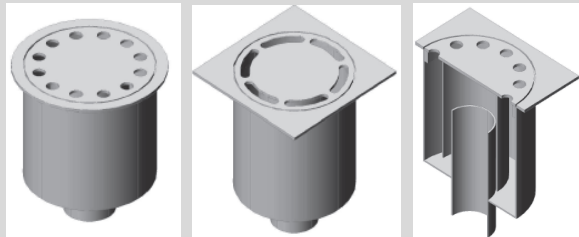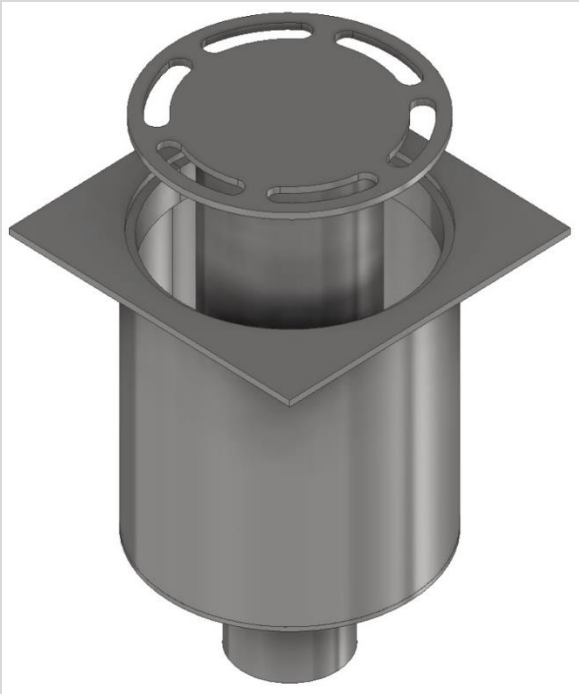

Product range

and Specification

RO125V NW50 range



Full Flow Floor Trap with the following features:


- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A single water seal to ensure odor-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Top cover plate type: Slots or Holes – as required
 - Flow rate: 0.8l/sec
 - Load capacity : 400 kg
 - Outlet position: Bottom Vertical
 - Outlet pipe outside diameter: 50.8mm

NOTE: Floor finish to be specified

Typical applications:

Public toilets, Office block kitchenettes, Laundries

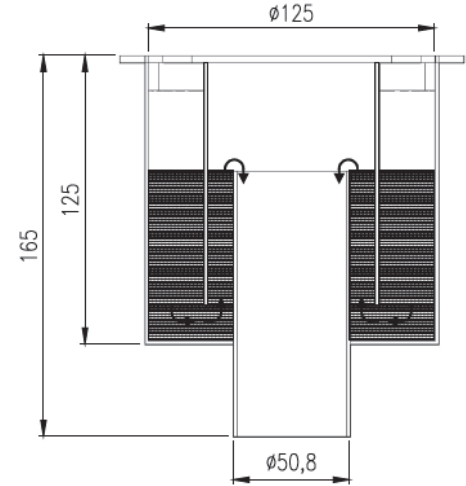

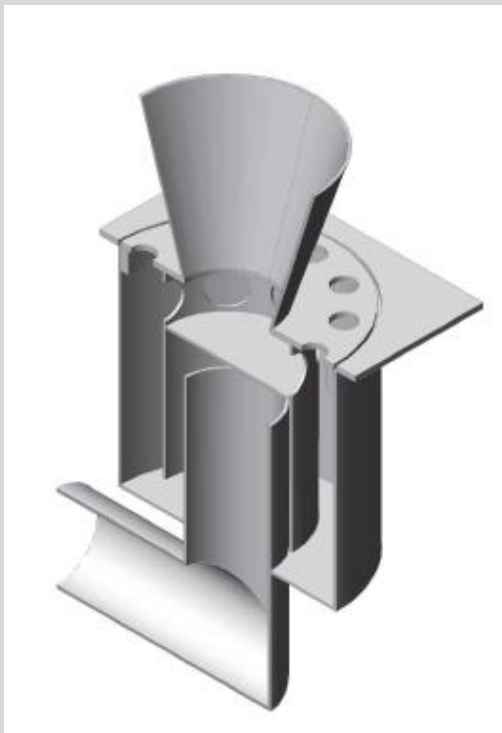

Product range




and Specification

RO125H NW50 range
Funnel Type

Full Flow Floor Trap with the following features:


- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A single water seal to ensure odor-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Top cover plate type: Slots or Holes – as required
 - Flow rate: 0.8l/sec
 - Load capacity : 400 kg
 - Outlet position: Bottom Horizontal
 - Outlet pipe outside diameter: 50.8mm

NOTE: Floor finish to be specified

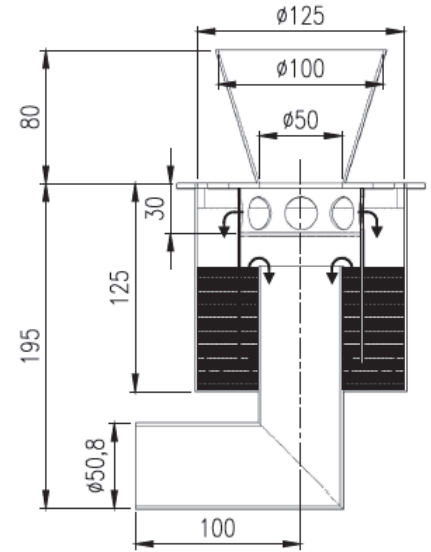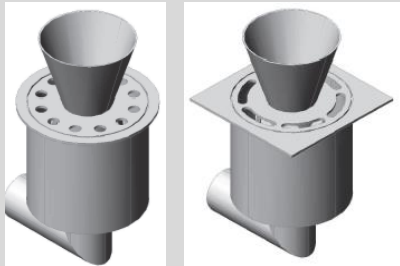

Typical applications:

Wherever there is a need to discharge directly into the drain above the floor level – Kitchenettes, Laundries

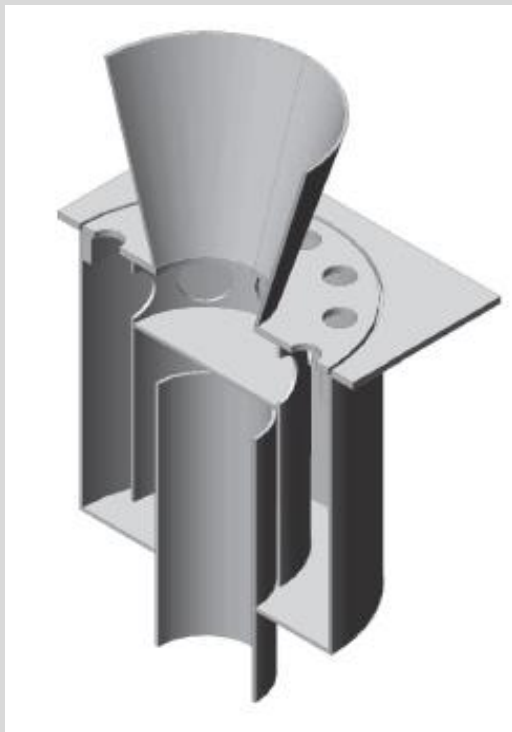

Product range





and Specification

RO125V NW50 range
Funnel Type

Full Flow Floor Trap with the following features:

- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A single water seal to ensure odor-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Top cover plate type: Slots or Holes – as required
 - Flow rate: 0.8l/sec
 - Load capacity : 400 kg
 - Outlet position: Bottom Vertical
 - Outlet pipe outside diameter: 50.8mm

NOTE: Floor finish to be specified

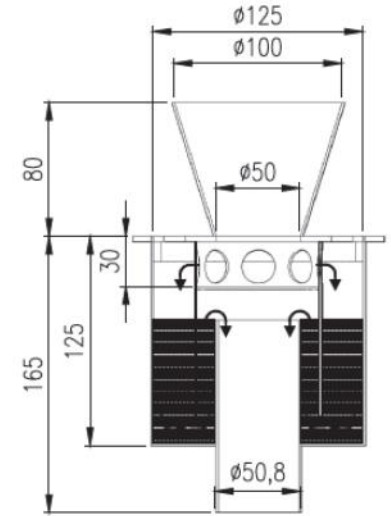

Typical applications:

Wherever there is a need to discharge directly into the drain above the floor level – Kitchenettes, Laundries

Your local sales contact

ACO Systems Ltd Nigeria & West Africa

5 Louis Solomon Cl,
Victoria Island
Lagos
Nigeria
Tel. +234 703 205 5178|
Mob. +234 815 750 1635
Email charles.rock@aco.com

www.aco.com.ng
www.buildingdrainage.aco
www.hygienefirst.com

Every product from ACO supports the ACO system chain

- Drainage channels and gratings
- Road and point drainage
- Access covers
- Manhole covers
- Oil separators
- Grease separators
- Bridge drains
- Parking area drainage
- Sport facility drainage

