

ACO Industrial


Floor Drainage

RO200 range

Rofo™

A brand of the ACO Group



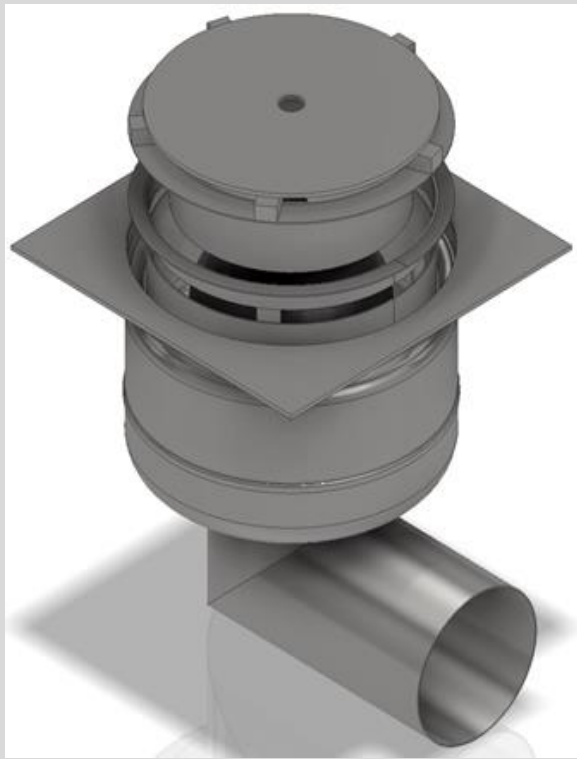

Product range

and Specification

RO200H NW100 range



Full Flow Floor Trap with the following features:

- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A double water seal to ensure odor-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- A large sludge box which contains coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Optional perforated outlet cap
- Top cover plate type: Slots/ Holes or Circular Aperture – as required
 - Flow rate: 3l/sec
 - Load capacity : 1000 kg
 - Outlet position: Bottom Horizontal
 - Outlet pipe outside diameter: 104/110mm


NOTE: Floor finish to be specified

Typical applications:

Dining Halls, Nursing Homes, Cold rooms


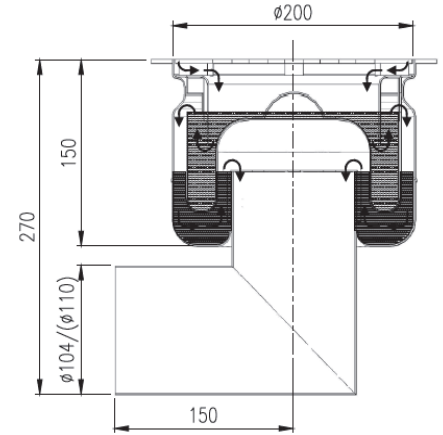


SQUARE FLANGE FOR TILES FLOORS



ROUND FLANGE FOR EPOXY FLOORS



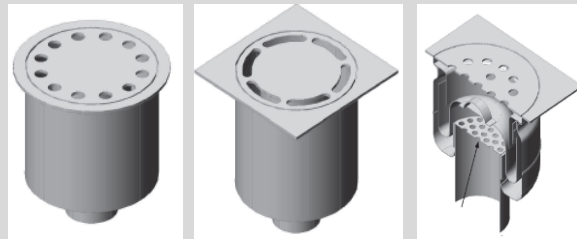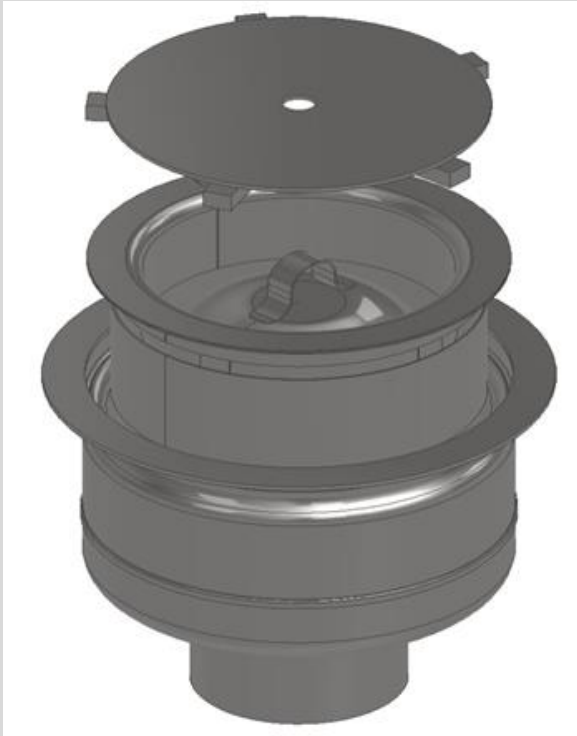

Product range

and Specification



RO200V NW100 range

Full Flow Floor Trap with the following features:


- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A double water seal to ensure odor-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- A large sludge box which contains coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Optional Perforated outlet cap
- Top cover plate type: Slots/ Holes or Circular Aperture – as required
 - Flow rate: 3l/sec
 - Load capacity : 1000 kg
 - Outlet position: Bottom Vertical
 - Outlet pipe outside diameter: 104/110mm

NOTE: Floor finish to be specified

Typical applications:
Dining Halls, Nursing Homes, Cold rooms

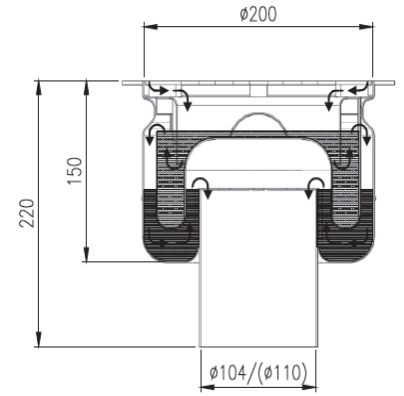


SQUARE FLANGE FOR TILES FLOORS



ROUND FLANGE FOR EPOXY FLOORS



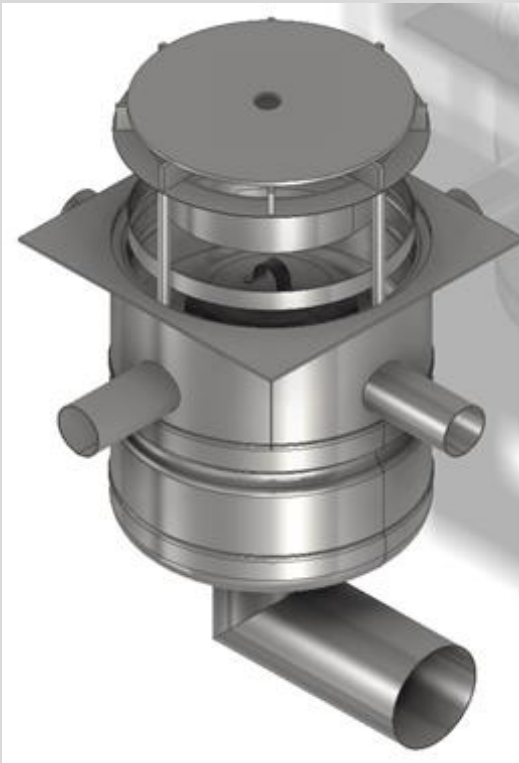

Product range

and Specification

RO200 SH NW100 range 1-4 side inlets


Full Flow Floor Trap with the following features:


- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A double water seal to ensure odor-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- A large sludge box which contains coarse slurry
- The discharge pipe is fully accessible once the drain has been dismantled
- Easy to dismantle
- Optional perforated outlet cap
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Top cover plate type: Slots/ Holes or Circular Aperture – as required
- Extension for side inlets: 1,2,3 or 4 inlets
 - Flow rate: 3l/sec
 - Load capacity : 1000 kg
 - Outlet position: Bottom Horizontal
 - Outlet pipe outside diameter: 104/110mm

NOTE: Floor finish to be specified

Typical applications:

Where there is a need to connect sinks directly to floor trap under the ground

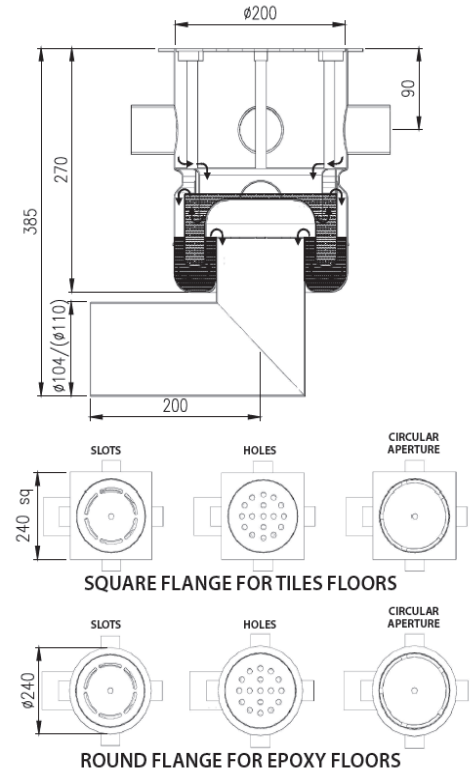

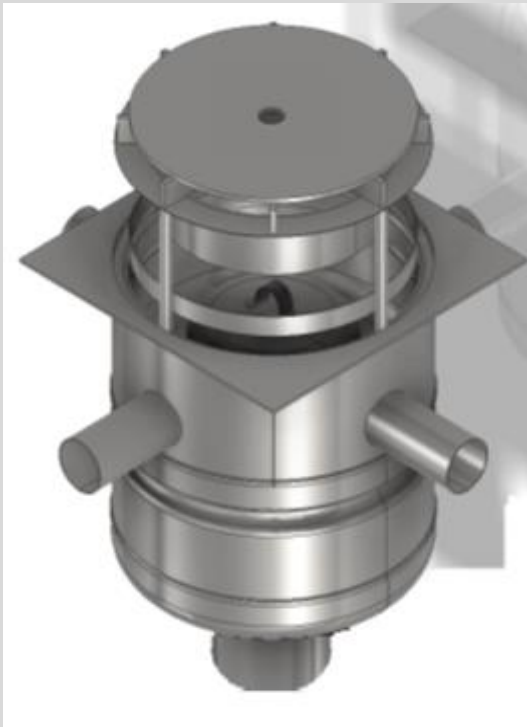

Product range

and Specification

RO200 SV NW100 range 1-4 side inlets



Full Flow Floor Trap with the following features:

- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A double water seal to ensure odor-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- A large sludge box which contains coarse slurry
- The discharge pipe is fully accessible once the drain has been dismantled
- Easy to dismantle
- Optional perforated outlet cap
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Top cover plate type: Slots/ Holes or Circular Aperture – as required
- Extension for side inlets: 1,2,3 or 4 inlets
 - Flow rate: 3l/sec
 - Load capacity : 1000 kg
 - Outlet position: Bottom Vertical
 - Outlet pipe outside diameter: 104/110mm


NOTE: Floor finish to be specified

Typical applications:


Where there is a need to connect sinks directly to floor trap under the ground

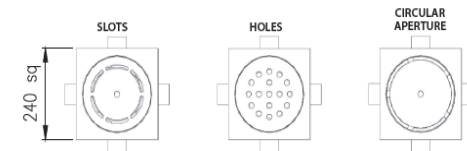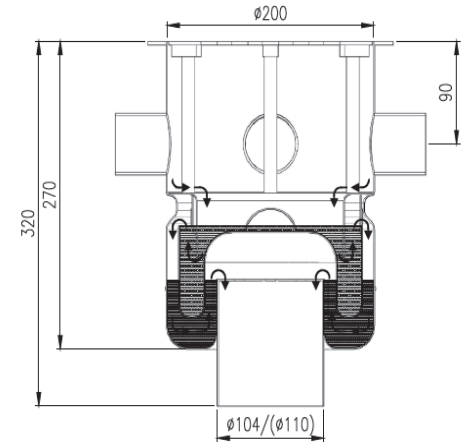

SQUARE FLANGE FOR TILES FLOORS

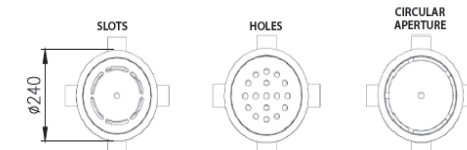

ROUND FLANGE FOR EPOXY FLOORS

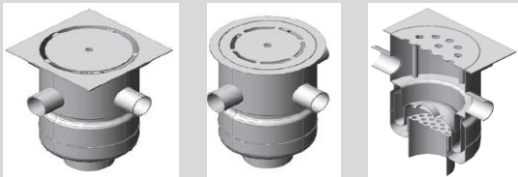

Product range

and Specification

RO200H NW100 Heavy Duty


Full Flow Floor Trap with the following features:

- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A double water seal to ensure odor-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- A large sludge box which contains coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Optional Perforated outlet cap
- Top cover plate type: Holes
 - Flow rate: 3l/sec
 - Load capacity : 2500 kg
 - Outlet position: Bottom Horizontal
 - Outlet pipe outside diameter: 104/110mm






NOTE: Floor finish to be specified


Typical applications:

Wherever there is a need for higher load capacity, such as general food processing etc.


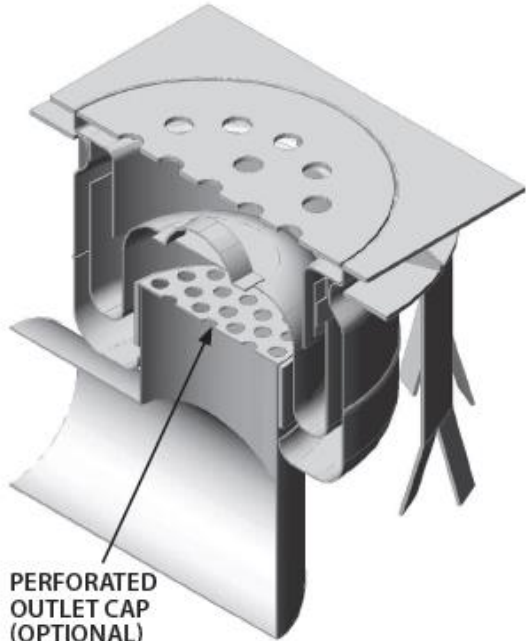


PERFORATED
OUTLET CAP
(OPTIONAL)

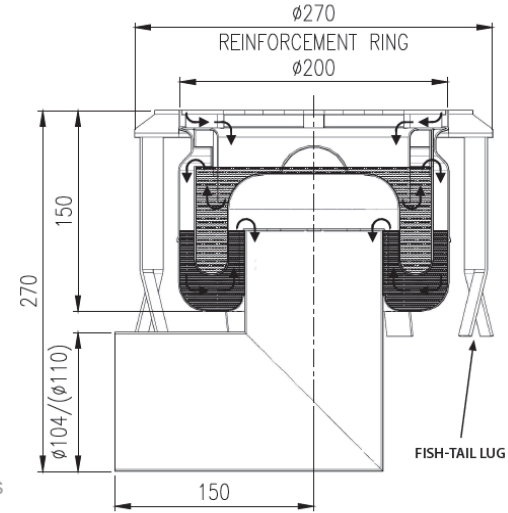

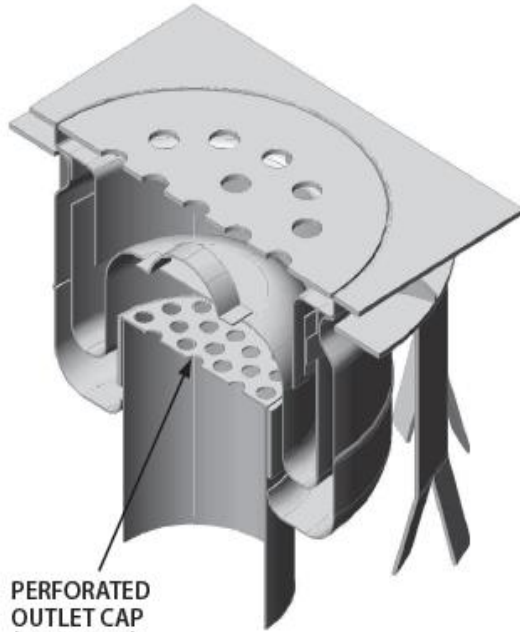

PERFORATED
OUTLET CAP
(OPTIONAL)



Product range

and Specification

RO200V NW100 Heavy Duty


Full Flow Floor Trap with the following features:

- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A double water seal to ensure odor-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- A large sludge box which contains coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Round (for epoxy floors) or Square (for tiled floors)
- Optional Perforated outlet cap
- Top cover plate type: Holes
 - Flow rate: 3l/sec
 - Load capacity : 2500 kg
 - Outlet position: Bottom Vertical
 - Outlet pipe outside diameter: 104/110mm


NOTE: Floor finish to be specified

Typical applications:


Wherever there is a need for higher load capacity, such as general food processing etc.

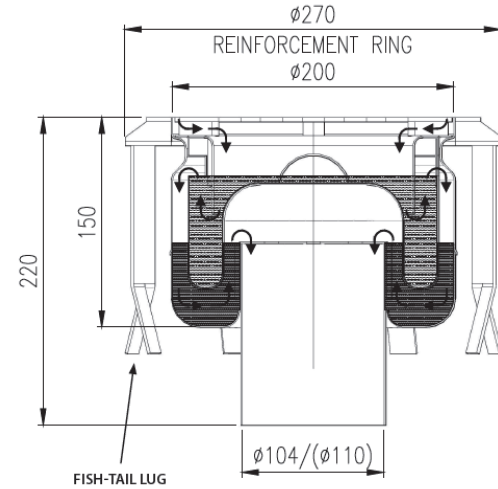

FISH-TAIL LUG



SQUARE FLANGE
FOR TILES FLOORS



ROUND FLANGE
FOR EPOXY FLOORS

Rofo™

A brand of the ACO Group

ACO

Product range

and Specification

RO200H NW100 Heavy Duty with Grating




Full Flow Floor Trap with the following features:

- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A double water seal to ensure odor-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- A large sludge box which contains coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Square (for tiled floors)
- Optional Perforated outlet cap
- Grating frame type: Square
- Top cover plate type: Slots/ Holes or Circular Aperture – as required
 - Flow rate: 3l/sec
 - Load capacity : 2500 kg
 - Outlet position: Bottom Horizontal
 - Outlet pipe outside diameter: 104/110mm

NOTE: Floor finish to be specified

Typical applications:

Wherever there is a need for higher load capacity, such as packaging facilities etc.

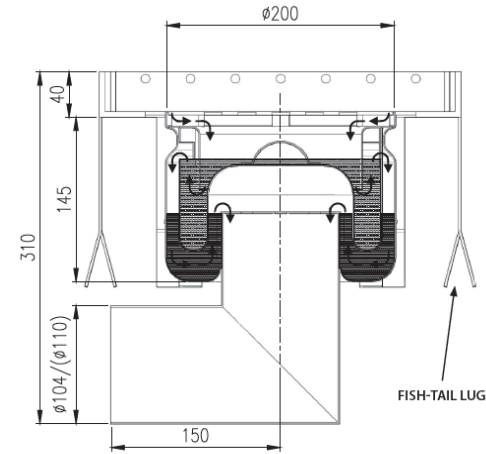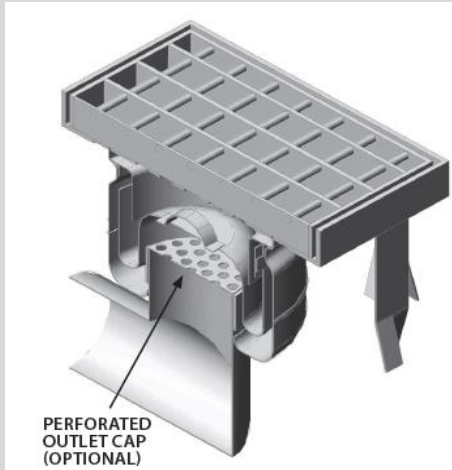

SQUARE FLANGE FOR TILES FLOORS

Product range

and Specification

RO200V NW100 Heavy Duty with Grating



Full Flow Floor Trap with the following features:

- Manufactured from Stainless Steel 304 to ensure acid corrosion and stain resistance
- A double water seal to ensure odor-free operation
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates
- A large sludge box which contains coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled
- Top flange type: Square (for tiled floors)
- Optional Perforated outlet cap
- Grating frame type: Square
- Top cover plate type: Slots/ Holes or Circular Aperture – as required
 - Flow rate: 3l/sec
 - Load capacity : 2500 kg
 - Outlet position: Bottom Vertical
 - Outlet pipe outside diameter: 104/110mm

NOTE: Floor finish to be specified

Typical applications:

Wherever there is a need for higher load capacity, such as packaging facilities etc.

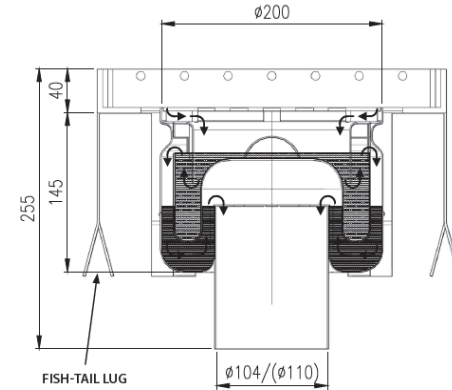

SQUARE FLANGE FOR TILES FLOORS

Your local sales contact

ACO Systems Ltd Nigeria & West Africa

5 Louis Solomon Cl,
Victoria Island
Lagos
Nigeria
Tel. +234 703 205 5178
Mob. +234 815 750 1635
Email charles.rock@aco.com

www.aco.com.ng
www.buildingdrainage.aco
www.hygienefirst.com
www.buildingdrainage.aco
www.hygienefirst.com

Every product from ACO supports the ACO system chain

- Drainage channels and gratings
- Road and point drainage
- Access covers
- Manhole covers
- Oil separators
- Grease separators
- Bridge drains
- Parking area drainage
- Sport facility drainage

